
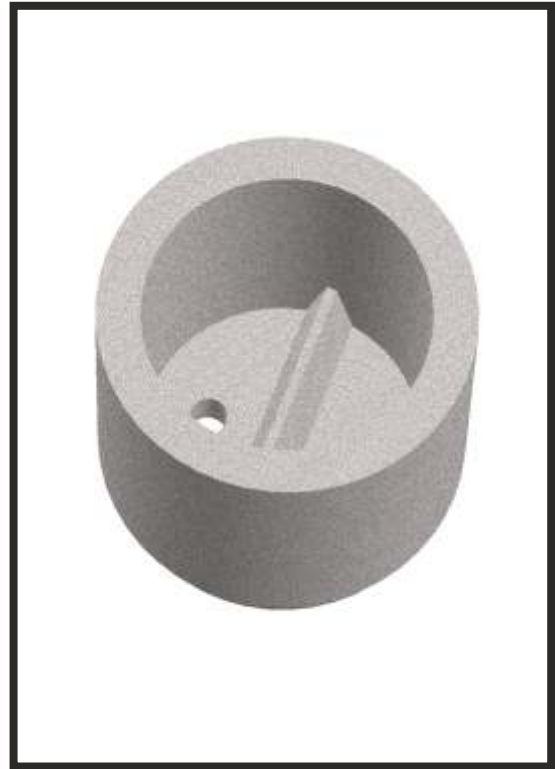


# GES FOUNDRY PRODUCTS METALLURGY

## (KX SX TYPE EXOTHERMIC FEEDER)

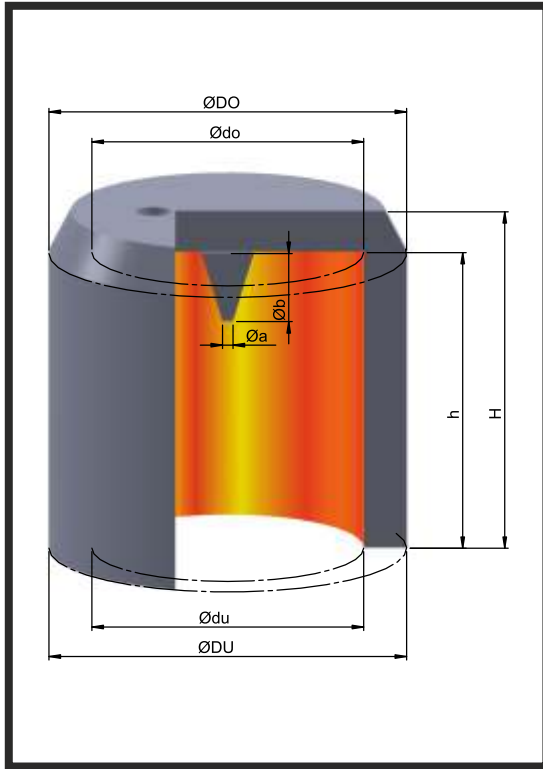

TYPE	MODULE (cm)		DIMENSIONS(mm)							VOLUME dm <sup>3</sup>
	KX SX	GEOM	du	Du	do	Do	h	H		
KX SX3,5/5	0,90	0.60	35.0	53.0	30.5	49.0	39.5	49.5	0.03	
KX SX4/7	1.05	0.75	41.5	62.5	35.5	59.0	63.0	71.5	0.07	
KX SX4/95	1.20	0.80	42.5	63.0	36.0	59.0	85.0	97.0	0.10	
KX SX5/8	1.40	0.95	52.0	73.5	48.0	70.0	70.0	80.0	0.13	
KX SX6/9	1.55	1.05	57.5	80.0	52.5	76.0	78.5	91.0	0.18	
KX SX6/12	1.60	1.10	57.5	80.0	52.5	75.0	105.0	120.0	0.26	
KX SX7/10	1,80	1.25	69.5	94.0	65.0	89.5	87.0	99.0	0.30	
KX SX8/11	2.05	1.40	79.0	102.0	71.5	99.0	96.5	108.0	0.42	
KX SX9/12	2.25	1.55	89.0	115.0	81.0	110.0	104.5	120.0	0.58	
KX SX10/13	2.55	1.75	97.0	127.5	91.0	119.0	117.0	133.0	0.80	
KX SX12/15	2,90	2.00	118.0	154.5	112.0	148.0	130.0	150.0	1.35	

TYPE - DIMENSIONS(mm)		
	a	b
KX SX		
KX SX3,5/5	12	2
KX SX4/7	14	2
KX SX4/95	14	2
KX SX5/8	16	2
KX SX6/9	18	2
KX SX6/12	18	2
KX SX7/10	20	3
KX SX8/11	22	3
KX SX9/12	24	3
KX SX10/13	26	3
KX SX12/15	-	-